
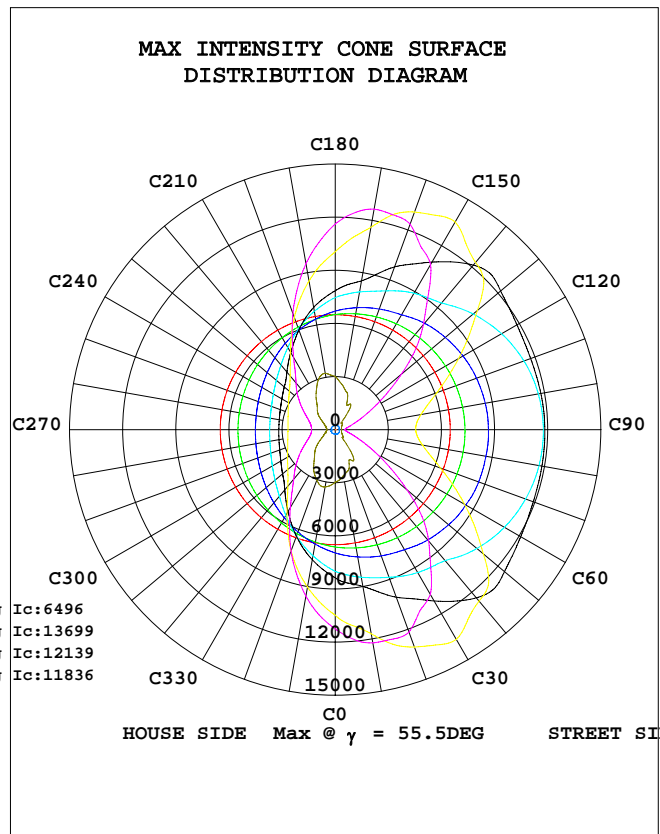


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:220.1V I:0.8510A P:182.1W PF:0.9710 Lamp Flux:26615x1 lm		
NAME: LED Street Light	TYPE:Cool White	WEIGHT:7.7Kg
SPEC.:	DIM.: 657*360*115mm	SERIAL No.:
MFR.: SPARK	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 146.16 lm/W			
MODEL	SPL-H180	I _{max} (cd)	14131	η street_up(%)	0.0
NOMINAL POWER(W)	180	LOR(%)	100.0	η street_down(%)	63.3
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	26615	η house_up(%)	0.0
NOMINAL FLUX(lm)	26615	MAXIMUM @(C,γ)	165,55.5	η house_down(%)	36.7
LAMPS INSIDE	1	η up(%)	0.0	76 FLASHAREA(m2)	0.05000
TEST VOLTAGE(V)	220.1	η down(%)	100.0	SLI	21.196

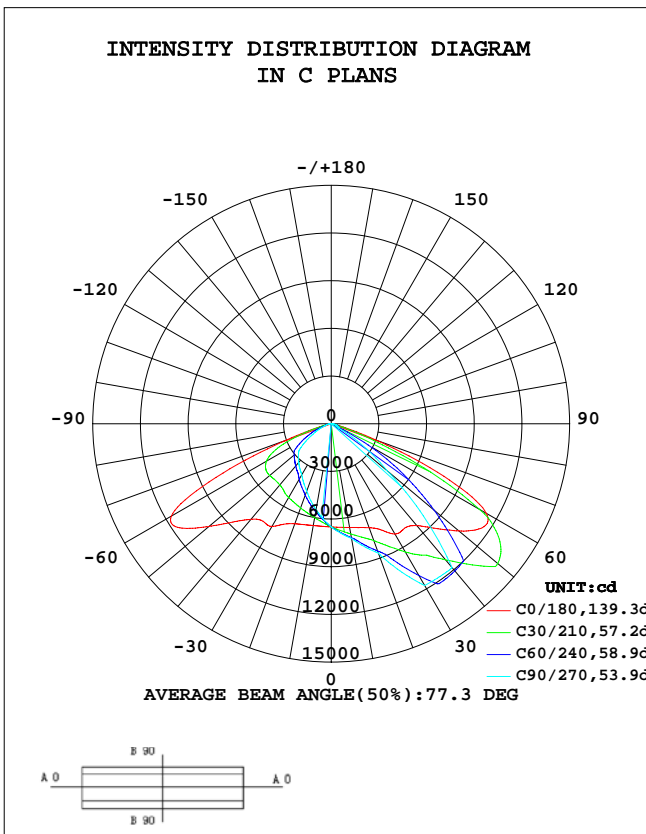


C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Grace
 Test Date: 2017-06-19

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.295
 Humidity: 65.0%
 Test Distance: 10.600m [K=1.0000]
 Remarks:

Note: SLI: Specific Luminaire Index

STREETLIGHT ISOCANDELA DIAGRAM

Test:U:220.1V I:0.8510A P:182.1W PF:0.9710 Lamp Flux:26615x1 lm		
NAME: LED Street Light	TYPE:Cool White	WEIGHT:7.7Kg
SPEC.:	DIM.: 657*360*115mm	SERIAL No.:
MFR.: SPARK	SUR.:	Shielding Angle:

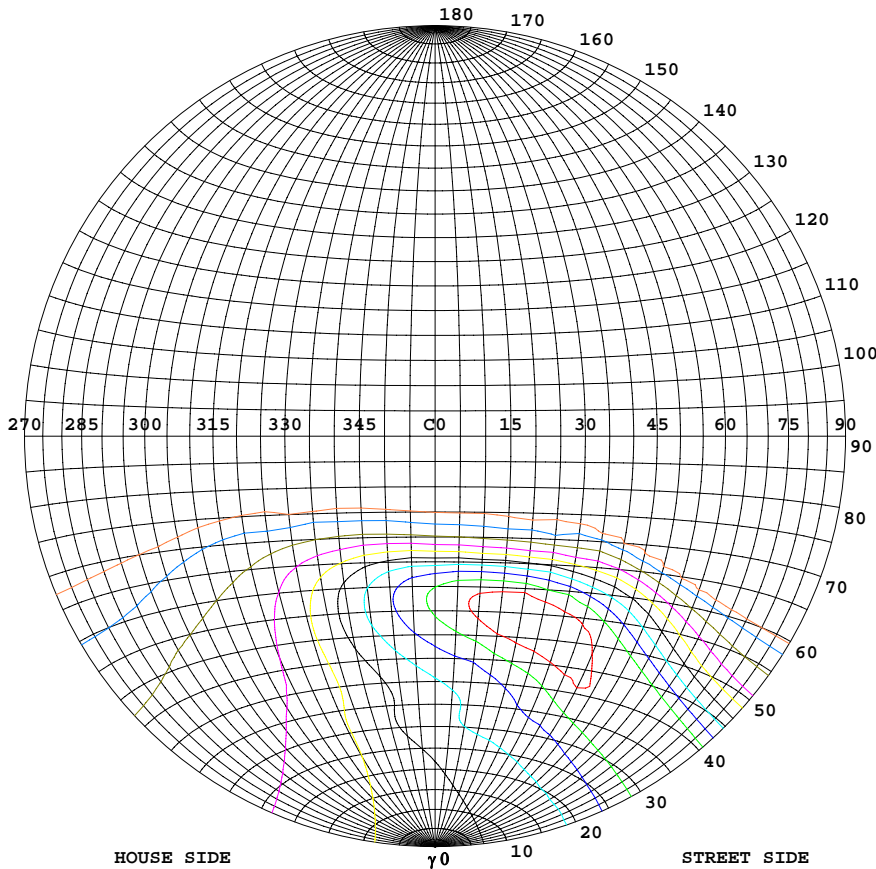

Classification:



IES:Type II - Short
 CIE:Narrow - Short
 IES:Cut-off
 CIE:Full cut-off
 Max.At80:11.03cd/klm
 Max.At90:0.1827cd/klm
 Max.80-90:11.03cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	14131
90%	12718
80%	11305
70%	9892
60%	8479
50%	7066
40%	5653
30%	4239
20%	2826
10%	1413
5%	707

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Grace
 Test Date:2017-06-19

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
 Humidity:65.0%
 Test Distance:10.600m [K=1.0000]
 Remarks:

**COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM**

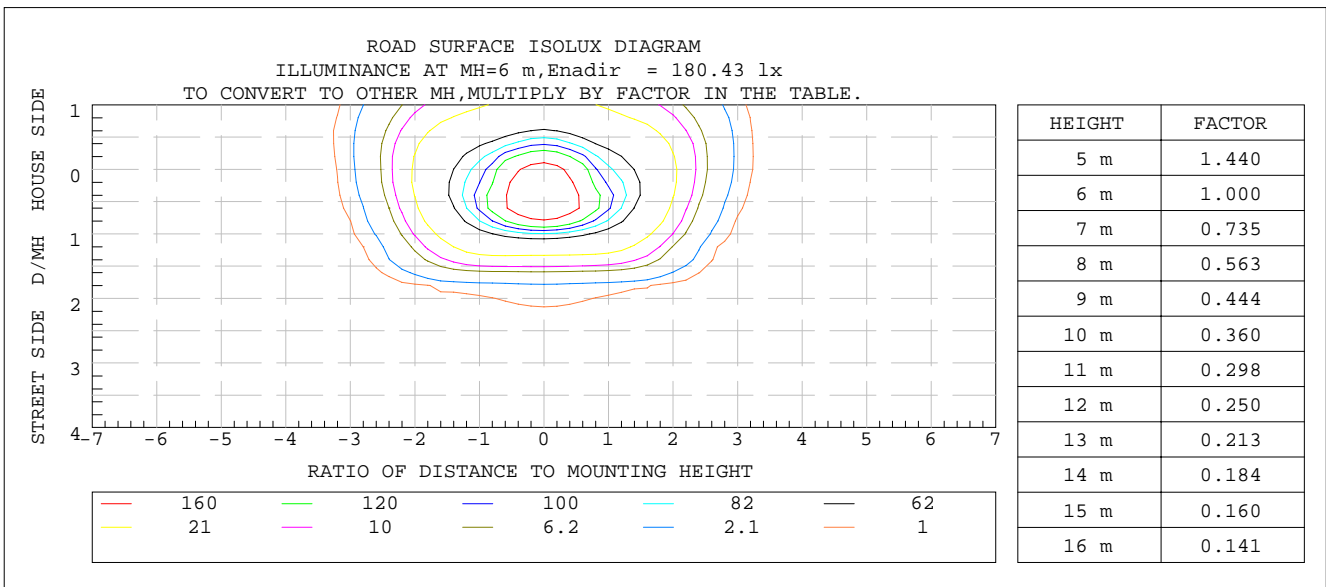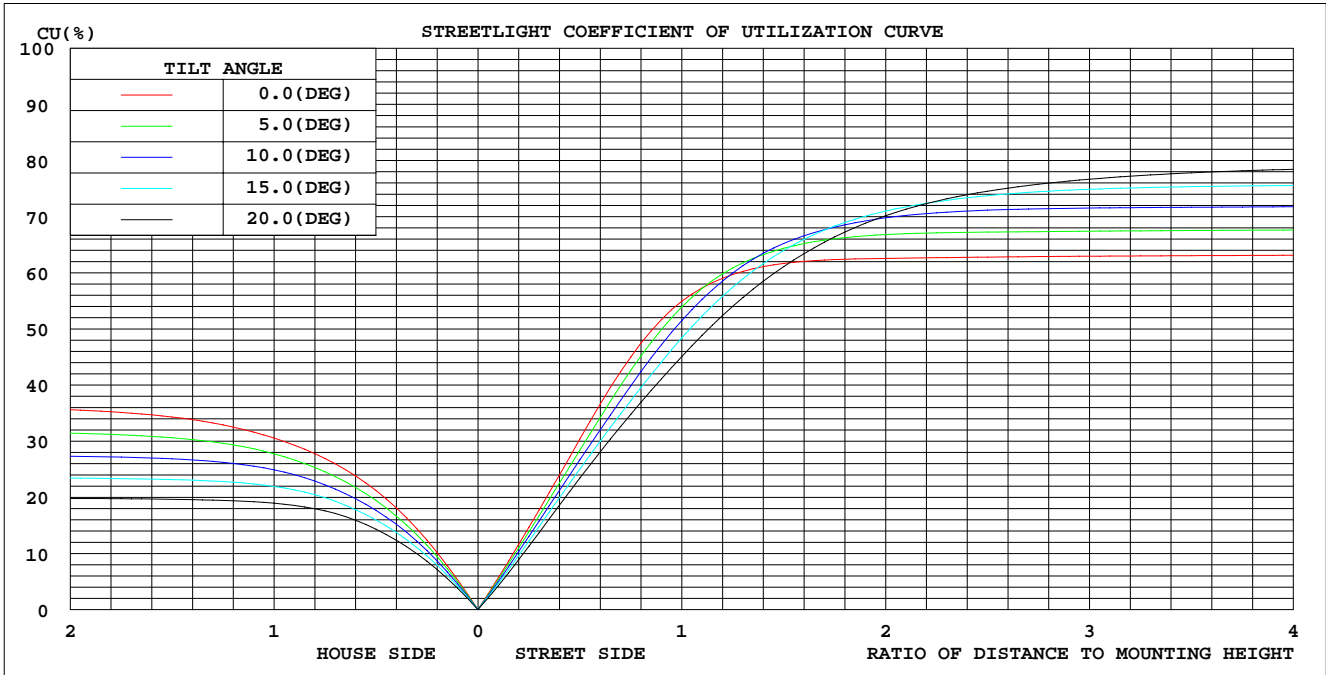

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Grace
 Test Date: 2017-06-19

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.295
 Humidity: 65.0%
 Test Distance: 10.600m [K=1.0000]
 Remarks:



ZONAL FLUX DIAGRAM

Test:U:220.1V I:0.8510A P:182.1W PF:0.9710 Lamp Flux:26615x1 lm		
NAME: LED Street Light	TYPE:Cool White	WEIGHT:7.7Kg
SPEC.:	DIM.: 657*360*115mm	SERIAL No.:
MFR.: SPARK	SUR.:	Shielding Angle:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	*lum,lamp
5	654.4	682.4	691.2	677.2	648.0	613.1	599.6	616.7	0- 5	155.0	155.0	0.58,0.58
10	663.0	718.2	732.8	706.5	650.6	578.8	549.6	584.5	5- 10	463.3	618.3	2.32,2.32
15	676.5	761.8	798.9	742.3	657.6	546.8	500.4	553.2	10- 15	772.2	1391	5.22,5.22
20	696.2	824.4	865.1	798.9	670.0	515.4	451.2	523.3	15- 20	1089	2480	9.32,9.32
25	736.0	897.4	1020	863.2	697.1	483.5	410.9	493.1	20- 25	1431	3911	14.7,14.7
30	800.9	1008	1175	976.3	746.3	454.2	370.6	466.0	25- 30	1834	5745	21.6,21.6
35	803.7	1153	1179	1125	749.0	425.1	344.9	440.0	30- 35	2251	7996	30,30
40	836.7	1269	1184	1242	785.1	395.0	319.1	410.2	35- 40	2610	10607	39.9,39.9
45	931.7	1253	819.2	1219	874.9	380.3	293.2	395.0	40- 45	2913	13519	50.8,50.8
50	1048	1225	454.8	1186	1005	362.7	267.3	378.0	45- 50	3056	16575	62.3,62.3
55	1148	976.3	255.3	929.2	1146	342.3	200.5	357.6	50- 55	3072	19646	73.8,73.8
60	1125	692.8	55.75	641.1	1161	307.8	133.8	323.0	55- 60	2852	22498	84.5,84.5
65	782.4	298.9	46.08	273.7	800.4	230.2	90.46	249.5	60- 65	2179	24677	92.7,92.7
70	295.7	63.09	36.41	54.54	300.8	142.3	47.15	159.9	65- 70	1196	25873	97.2,97.2
75	68.12	36.39	29.19	34.79	66.50	52.81	32.59	59.09	70- 75	458.3	26331	98.9,98.9
80	22.14	25.78	21.97	24.90	22.12	25.05	18.04	27.16	75- 80	186.1	26517	99.6,99.6
85	9.514	8.442	0	8.084	8.649	5.944	0	6.118	80- 85	87.36	26604	100,100
90	0.4863	0	0	0	0.2564	0	0	0	85- 90	10.59	26615	100,100
95									90- 95			
100									95-100			
105									100-105			
110									105-110			
115									110-115			
120									115-120			
125									120-125			
130									125-130			
135									130-135			
140									135-140			
145									140-145			
150									145-150			
155									150-155			
160									155-160			
165									160-165			
170									165-170			
175									170-175			
180									175-180			
DEG	LUMINOUS INTENSITY:×10cd								UNIT:lm			

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Grace
 Test Date:2017-06-19

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
 Humidity:65.0%
 Test Distance:10.600m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:220.1V I:0.8510A P:182.1W PF:0.9710 Lamp Flux:26615x1 lm		
NAME: LED Street Light	TYPE:Cool White	WEIGHT:7.7Kg
SPEC.:	DIM.: 657*360*115mm	SERIAL No.:
MFR.: SPARK	SUR.:	Shielding Angle:

Conical surface Flux(90deg):

13519 lm
 %lum = 50.8%
 %lamp = 50.8%

Conical surface Flux(120deg):


22498 lm
 %lum = 84.5%
 %lamp = 84.5%

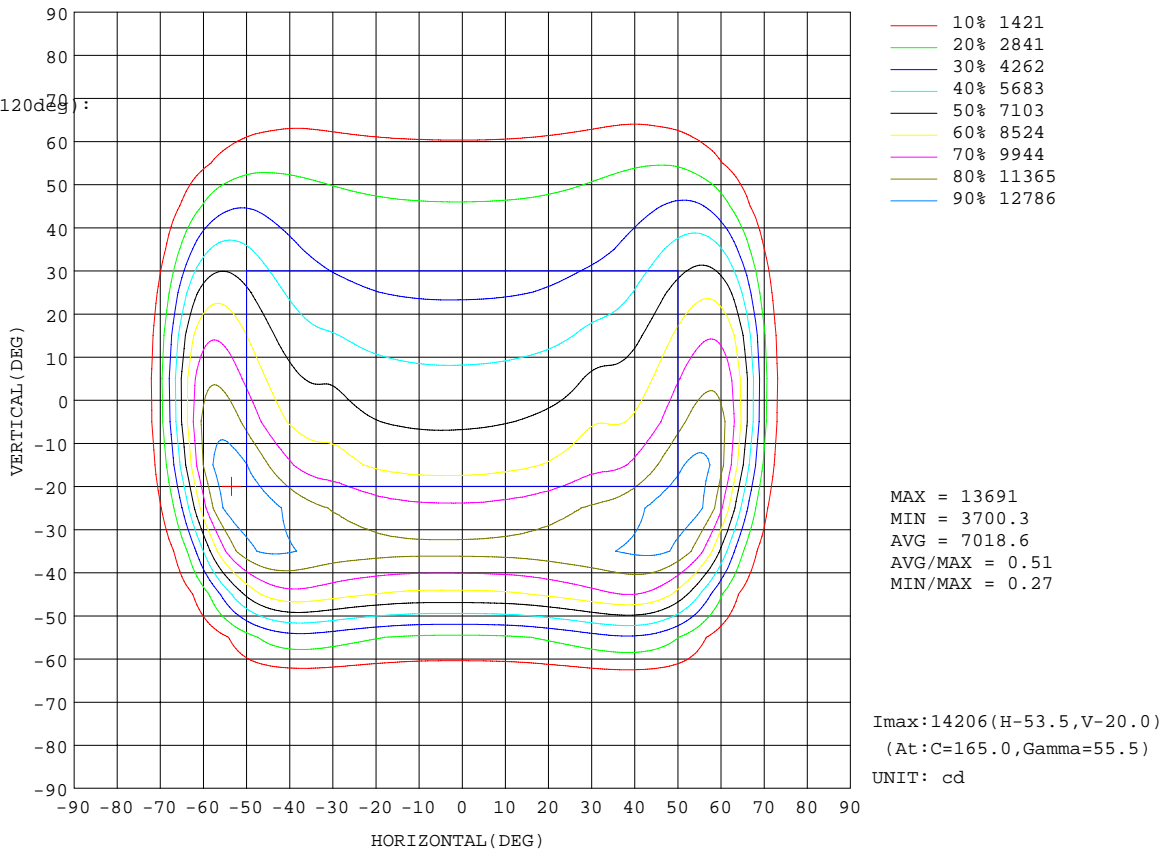

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Grace
 Test Date:2017-06-19

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
 Humidity:65.0%
 Test Distance:10.600m [K=1.0000]
 Remarks:

Planar Illuminance Curve

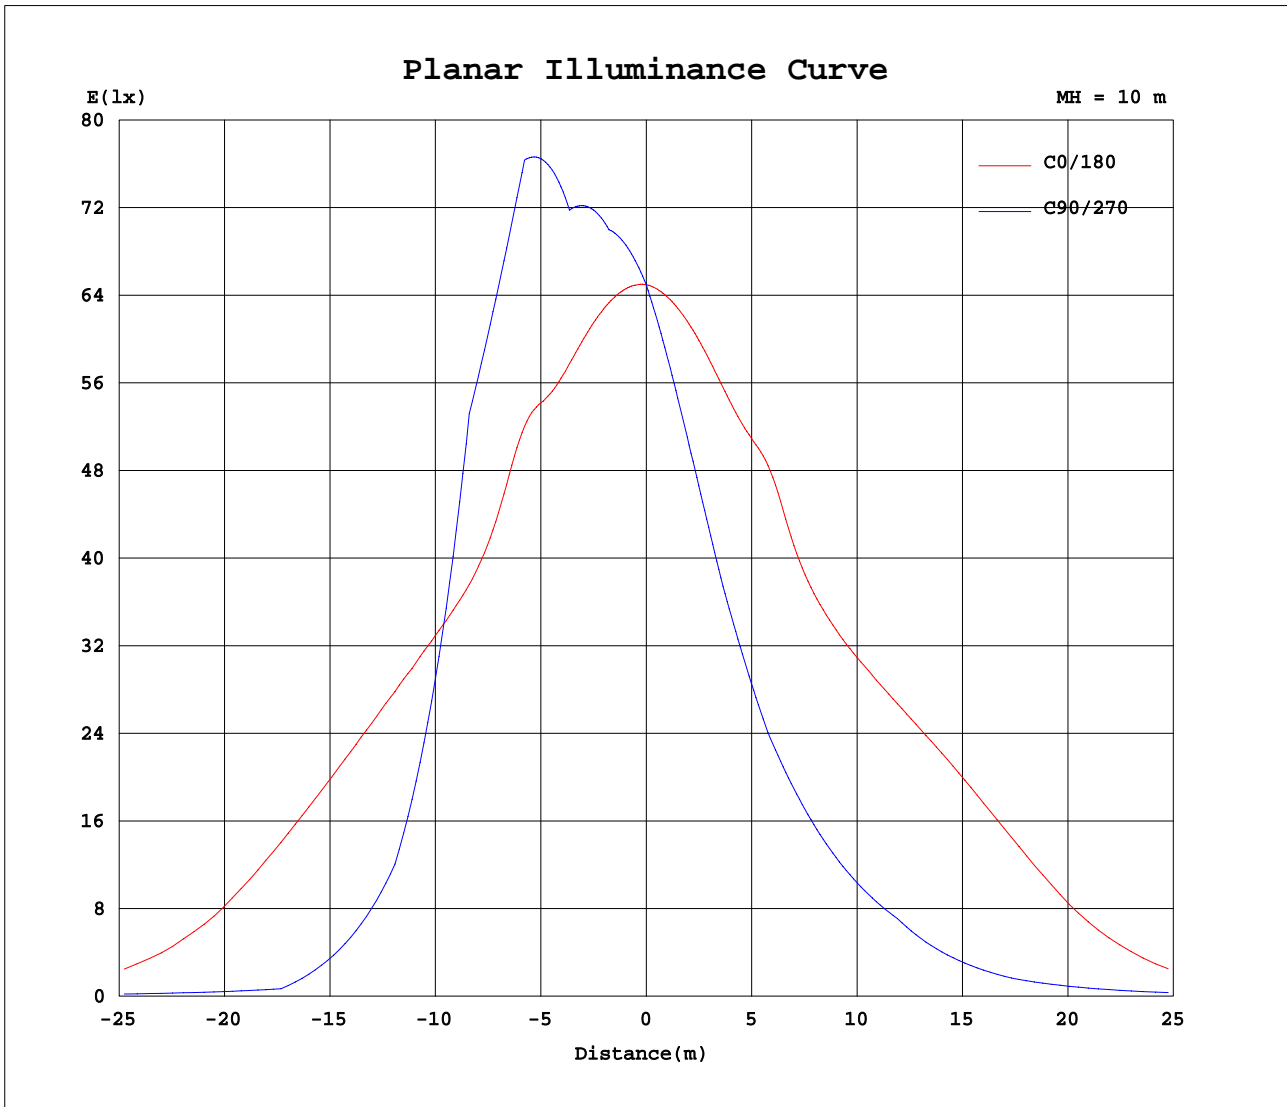


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Grace
Test Date: 2017-06-19

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.295
Humidity: 65.0%
Test Distance: 10.600m [K=1.0000]
Remarks:

LCS REPORT

Test:U:220.1V I:0.8510A P:182.1W PF:0.9710 Lamp Flux:26615x1 lm		
NAME: LED Street Light	TYPE:Cool White	WEIGHT:7.7Kg
SPEC.:	DIM.: 657*360*115mm	SERIAL No.:
MFR.: SPARK	SUR.:	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

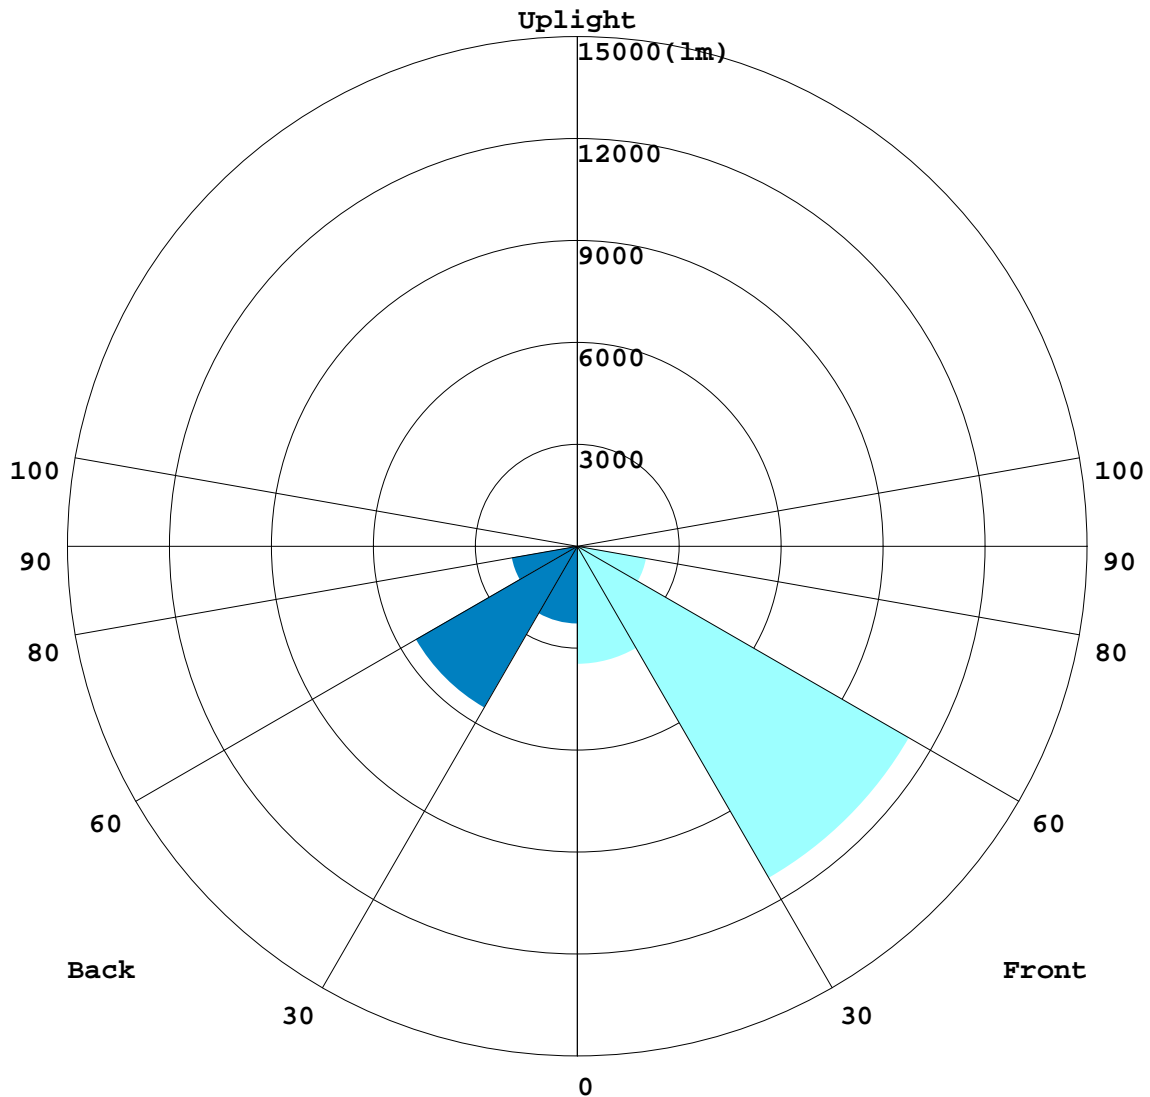

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Grace
 Test Date:2017-06-19

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
 Humidity:65.0%
 Test Distance:10.600m [K=1.0000]
 Remarks:

BUG REPORT

Test:U:220.1V I:0.8510A P:182.1W PF:0.9710 Lamp Flux:26615x1 lm		
NAME: LED Street Light	TYPE:Cool White	WEIGHT:7.7Kg
SPEC.:	DIM.: 657*360*115mm	SERIAL No.:
MFR.: SPARK	SUR.:	Shielding Angle:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	3467.2	13.0
FM - Front-Medium(30-60)	11273	42.4
FH - Front-High(60-80)	2062.5	7.7
FVH - Front-Very High(80-90)	51.941	0.2
Total Forward Light	16854	63.3

BL - Back-Low(0-30)	2278	8.6
BM - Back-Medium(30-60)	5480.2	20.6
BH - Back-High(60-80)	1956.4	7.4
BVH - Back-Very High(80-90)	46.012	0.2
Total Back Light	9760.5	36.7

UL - Uplight-Low(90-100)	0	0.0
UH - Uplight-High(100-180)	0	0.0
Total Up Light	0	0.0

BUG(Back,Up,Glare) Rating	B4-U0-G3
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	16854	0	16854
Street Side	9760.5	0	9760.5


C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Grace
 Test Date:2017-06-19

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
 Humidity:65.0%
 Test Distance:10.600m [K=1.0000]
 Remarks:

ROAD ISOCANDELA REPORT

Test:U:220.1V I:0.8510A P:182.1W PF:0.9710 Lamp Flux:26615x1 lm		
NAME: LED Street Light	TYPE:Cool White	WEIGHT:7.7Kg
SPEC.:	DIM.: 657*360*115mm	SERIAL No.:
MFR.: SPARK	SUR.:	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

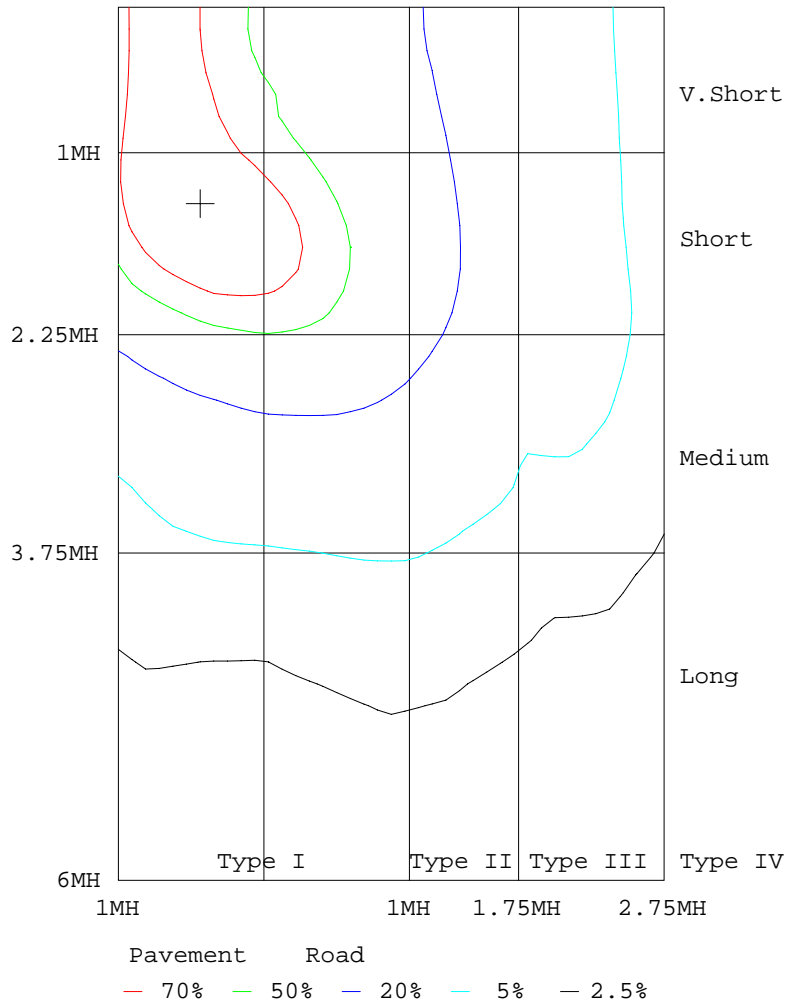

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Grace
 Test Date:2017-06-19

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
 Humidity:65.0%
 Test Distance:10.600m [K=1.0000]
 Remarks:



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.1V I:0.8510A P:182.1W PF:0.9710 Lamp Flux:26615x1 lm		
NAME: LED Street Light	TYPE:Cool White	WEIGHT:7.7Kg
SPEC.:	DIM.: 657*360*115mm	SERIAL No.:
MFR.: SPARK	SUR.:	Shielding Angle:

Table--1

UNIT: x10cd

C(DEG) γ (DEG)	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
0	650	650	650	650	650	650	650	650	650	650	650	650	650	650	650	650	650	650	650
5	654	658	662	665	668	672	675	677	680	682	684	686	688	689	690	691	691	691	691
10	663	671	678	685	692	698	704	709	714	718	722	725	728	730	732	733	733	733	733
15	676	689	700	711	721	730	739	746	752	762	771	779	786	790	794	797	799	800	799
20	696	714	730	745	759	770	783	799	813	824	836	846	851	859	862	863	864	866	865
25	736	759	779	797	812	830	850	867	882	897	908	928	956	976	994	1006	1014	1019	1020
30	801	825	846	866	888	912	932	947	966	1008	1044	1076	1103	1126	1144	1159	1169	1174	1175
35	804	832	860	890	939	980	1009	1057	1108	1153	1193	1226	1214	1201	1192	1186	1183	1181	1179
40	837	871	899	949	1007	1054	1117	1182	1240	1269	1247	1226	1209	1198	1190	1187	1185	1185	1184
45	932	976	1007	1083	1147	1200	1256	1316	1283	1253	1229	1210	1144	1050	969	904	858	830	819
50	1048	1110	1170	1254	1306	1342	1367	1308	1264	1225	1092	964	843	731	632	554	500	467	455
55	1148	1223	1296	1379	1368	1371	1296	1253	1120	976	836	694	556	447	367	313	280	262	255
60	1125	1188	1223	1226	1217	1130	1074	939	821	693	531	385	269	185	128	91.7	70.2	59.1	55.8
65	782	796	777	766	721	679	596	521	433	299	158	62.0	53.9	48.8	46.8	45.9	45.7	45.8	46.1
70	296	284	265	249	230	188	204	163	69.8	63.1	56.1	50.1	44.1	39.9	37.9	37.0	36.4	36.3	36.4
75	68.1	66.2	66.2	60.2	52.6	53.9	44.9	45.9	42.2	36.4	36.5	38.2	34.8	32.3	31.1	30.4	29.7	29.1	29.2
80	22.1	22.7	24.9	26.0	26.3	28.2	28.9	28.8	26.2	25.8	27.7	29.4	26.7	25.2	24.7	24.2	23.2	21.9	22.0
85	9.51	7.14	8.98	12.6	15.0	16.0	16.6	13.7	10.3	8.44	7.18	5.77	3.78	2.45	1.53	0.83	0.35	0.08	0.00
90	0.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Grace
 Test Date:2017-06-19

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
 Humidity:65.0%
 Test Distance:10.600m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.1V I:0.8510A P:182.1W PF:0.9710 Lamp Flux:26615x1 lm		
NAME: LED Street Light	TYPE:Cool White	WEIGHT:7.7Kg
SPEC.:	DIM.: 657*360*115mm	SERIAL No.:
MFR.: SPARK	SUR.:	Shielding Angle:

Table--2

UNIT: x10cd

C(DEG)\ γ (DEG)	95	100	105	110	115	120	125	130	135	140	145	150	155	160	165	170	175	180	185
0	650	650	650	650	650	650	650	650	650	650	650	650	650	650	650	650	650	650	650
5	691	690	689	688	686	684	682	680	677	674	672	669	665	662	659	655	652	648	644
10	732	730	728	725	723	719	715	711	707	702	696	690	684	678	672	665	658	651	642
15	798	795	791	785	779	772	763	753	742	732	724	716	708	699	689	679	668	658	645
20	864	860	855	849	842	833	822	811	799	785	768	750	737	726	713	700	685	670	653
25	1017	1010	997	981	959	933	905	879	863	848	829	810	787	767	753	736	718	697	674
30	1172	1164	1152	1134	1112	1085	1052	1017	976	935	910	890	864	834	809	790	769	746	714
35	1179	1178	1179	1181	1187	1196	1206	1169	1125	1077	1027	977	940	891	834	804	777	749	714
40	1182	1179	1176	1175	1177	1185	1199	1219	1242	1213	1157	1093	1032	978	910	854	823	785	745
45	826	850	891	949	1024	1112	1175	1193	1219	1256	1296	1238	1186	1133	1059	969	929	875	824
50	463	491	540	611	700	804	921	1048	1186	1233	1286	1354	1336	1308	1257	1161	1086	1005	935
55	259	275	304	351	420	515	640	782	929	1086	1235	1293	1380	1389	1413	1326	1244	1146	1049
60	59.1	70.0	90.5	124	175	250	354	488	641	774	911	1077	1142	1236	1257	1265	1229	1161	1062
65	45.9	45.8	46.1	46.8	48.8	52.9	58.5	144	274	396	467	554	662	701	742	783	787	800	779
70	36.3	36.5	37.0	37.8	39.6	43.3	47.9	51.5	54.5	58.5	141	167	154	207	228	252	274	301	310
75	29.1	29.6	30.1	30.6	31.7	34.2	37.4	36.6	34.8	38.5	41.5	41.8	48.1	45.8	54.2	63.2	66.1	66.5	71.5
80	21.9	22.9	23.5	23.9	24.4	26.0	28.3	27.2	24.9	25.0	27.1	27.4	27.2	25.4	25.6	25.2	22.5	22.1	24.8
85	0.08	0.35	0.81	1.47	2.37	3.66	5.51	6.90	8.08	9.37	11.8	14.7	14.1	13.0	11.2	8.48	6.65	8.65	11.2
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.26	0.00

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Grace
Test Date:2017-06-19

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
Humidity:65.0%
Test Distance:10.600m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.1V I:0.8510A P:182.1W PF:0.9710 Lamp Flux:26615x1 lm		
NAME: LED Street Light	TYPE:Cool White	WEIGHT:7.7Kg
SPEC.:	DIM.: 657*360*115mm	SERIAL No.:
MFR.: SPARK	SUR.:	Shielding Angle:

Table--3

UNIT: x10cd

C(DEG) γ (DEG)	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280
0	650	650	650	650	650	650	650	650	650	650	650	650	650	650	650	650	650	650	650
5	639	635	631	627	623	620	616	613	610	608	605	603	602	601	600	600	600	600	601
10	633	625	616	608	600	593	585	579	573	567	562	558	555	552	551	550	550	550	552
15	632	619	606	593	581	569	558	547	537	528	520	514	509	505	502	501	500	501	504
20	635	617	599	582	564	547	531	515	502	489	479	470	463	457	454	452	451	452	455
25	649	624	599	574	549	525	503	484	466	452	440	430	423	417	413	411	411	412	415
30	679	644	607	570	536	505	477	454	435	418	404	392	384	377	373	371	371	372	375
35	679	643	602	560	519	485	453	425	402	382	370	362	355	350	347	345	345	346	348
40	702	652	600	549	503	462	425	395	376	361	348	338	331	325	321	319	319	320	323
45	765	698	629	562	501	447	410	380	357	340	326	315	307	300	296	294	293	295	298
50	853	766	676	587	506	443	397	363	339	320	305	293	283	276	271	268	267	269	272
55	942	831	713	604	502	425	376	342	318	299	274	250	230	216	207	202	201	202	208
60	952	826	700	574	471	394	345	308	269	236	205	180	161	148	139	135	134	135	140
65	741	647	550	459	384	325	270	230	198	166	139	120	107	99.4	94.4	91.3	90.5	91.7	95.4
70	324	316	290	251	218	182	158	142	121	96.4	77.6	66.8	59.7	54.8	51.1	48.0	47.1	48.7	52.3
75	78.6	86.0	78.8	75.9	61.5	71.4	66.5	52.8	46.6	41.0	37.7	38.7	38.5	36.8	34.8	33.2	32.6	33.5	35.4
80	28.0	27.1	24.8	24.0	23.5	24.8	24.5	25.0	25.2	24.0	22.7	24.8	25.3	23.0	20.1	18.8	18.0	18.7	20.1
85	12.6	12.7	10.9	10.3	9.85	8.75	7.42	5.94	4.63	3.82	2.87	2.26	1.51	0.78	0.30	0.07	0.00	0.07	0.30
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Grace
 Test Date:2017-06-19

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
 Humidity:65.0%
 Test Distance:10.600m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.1V I:0.8510A P:182.1W PF:0.9710 Lamp Flux:26615x1 lm		
NAME: LED Street Light	TYPE:Cool White	WEIGHT:7.7Kg
SPEC.:	DIM.: 657*360*115mm	SERIAL No.:
MFR.: SPARK	SUR.:	Shielding Angle:

Table--4

UNIT: x10cd

C(DEG) γ (DEG)	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355				
0	650	650	650	650	650	650	650	650	650	650	650	650	650	650	650				
5	602	604	605	608	610	613	617	620	624	628	632	637	641	645	650				
10	554	557	561	566	571	578	585	592	600	608	617	626	635	645	654				
15	507	512	518	525	533	543	553	565	577	590	604	619	633	648	662				
20	460	466	474	484	495	509	523	539	557	575	595	615	636	656	676				
25	420	426	435	446	459	474	493	515	538	564	592	621	650	680	709				
30	380	388	398	410	426	444	466	491	523	559	598	640	683	724	763				
35	353	359	367	378	392	413	440	472	509	549	595	641	686	726	765				
40	328	334	343	355	370	389	410	444	487	534	586	641	695	746	794				
45	303	310	320	332	348	369	395	428	471	534	604	680	750	817	878				
50	278	286	298	312	329	350	378	417	471	546	634	729	819	903	980				
55	219	234	255	281	308	329	358	398	457	544	648	757	871	969	1063				
60	150	165	187	214	247	283	323	366	425	507	610	731	844	954	1050				
65	102	111	126	149	181	215	250	292	353	417	490	573	664	732	781				
70	56.3	62.2	70.9	83.1	105	133	160	182	208	244	278	304	327	328	317				
75	37.8	40.1	41.0	40.0	44.9	51.4	59.1	75.7	83.4	70.6	84.5	89.4	90.2	83.7	74.7				
80	23.3	26.0	25.6	23.5	25.4	27.1	27.2	26.2	25.9	24.0	24.6	24.7	26.5	26.7	25.0				
85	0.79	1.55	2.33	2.93	3.95	4.77	6.12	7.72	9.14	10.5	10.8	11.1	11.7	12.1	11.2				
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Grace
 Test Date:2017-06-19

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.295
 Humidity:65.0%
 Test Distance:10.600m [K=1.0000]
 Remarks: