
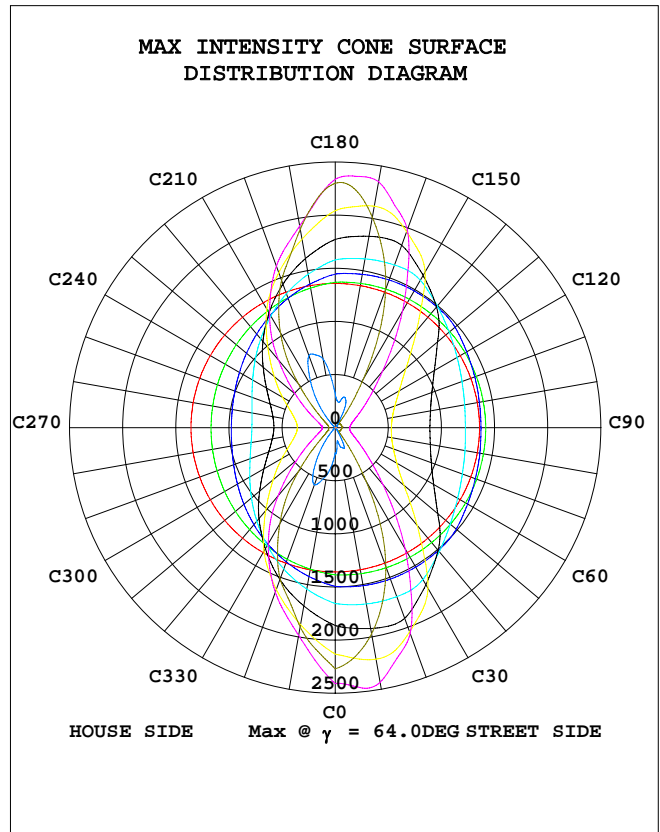


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:220.1V I:0.1500A P:31.10W PF:0.9420 Freq:50.00Hz Lamp Flux:5000x1 lm		
NAME: LED Street Light	TYPE:Cool White	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Spark Co., Ltd.	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 160.78 lm/W			
MODEL	SPWTL001-30-112	I _{max} (cd)	2481	η street_up(%)	0.0
NOMINAL POWER(W)	31.3	LOR(%)	100.0	η street_down(%)	52.7
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	5000	η house_up(%)	0.0
NOMINAL FLUX(lm)	5000	MAXIMUM @(C,γ)	5,64.0	η house_down(%)	47.3
LAMPS INSIDE	1	η up(%)	0.0	76 FLASHAREA(m2)	
TEST VOLTAGE(V)	220	η down(%)	100.0	SLI	

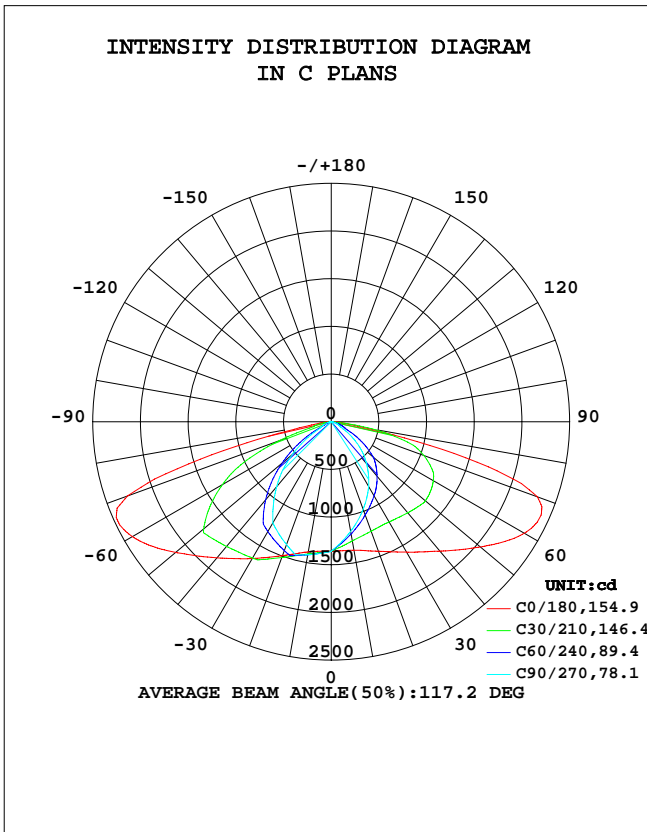


H(β) Range:-90 - 90DEG
H(β) Interval: 2.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Gao
Test Date:2018-10-19

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:11.010m [K=1.0000]
Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

Test:U:220.1V I:0.1500A P:31.10W PF:0.9420 Freq:50.00Hz Lamp Flux:5000x1 lm		
NAME: LED Street Light	TYPE:Cool White	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Spark Co., Ltd.	SUR.:	Shielding Angle:

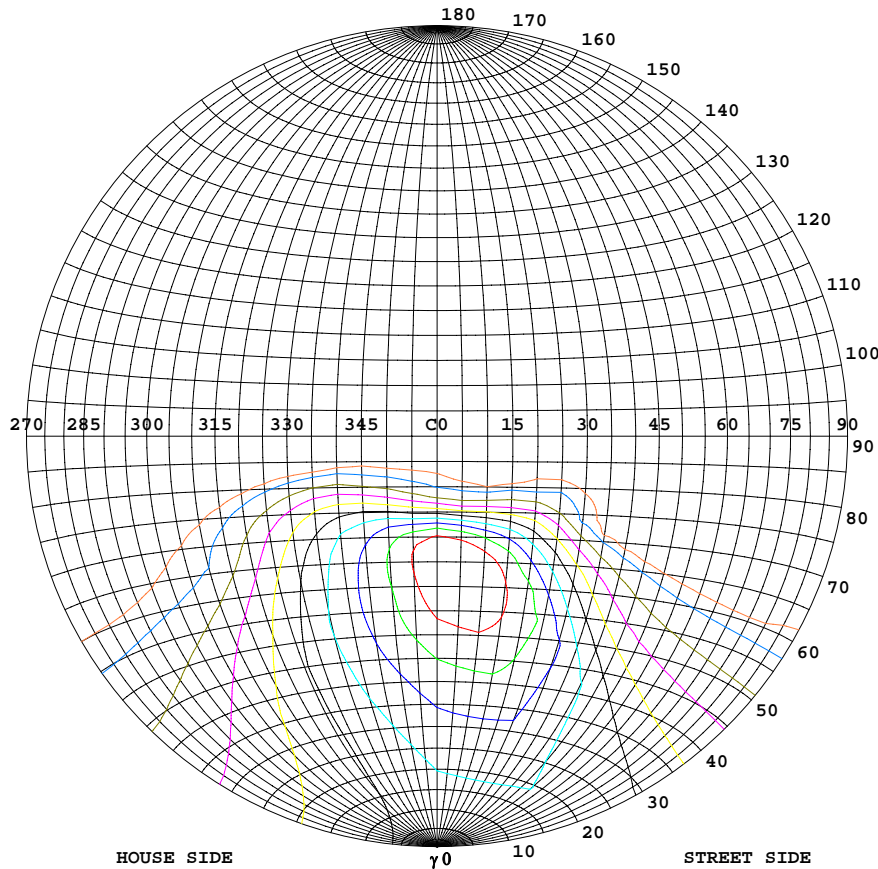

Classification:


IES:Type II - Short
 CIE:Narrow - Intermediate
 IES:Semi cut-off
 CIE:Non-cut-off
 Max.At80:144.9cd/klm
 Max.At90:1.201cd/klm
 Max.80-90:144.9cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	2481
90%	2233
80%	1985
70%	1737
60%	1489
50%	1241
40%	993
30%	744
20%	496
10%	248
5%	124

H(β) Range:-90 - 90DEG
 H(β) Interval: 2.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Gao
 Test Date:2018-10-19

V(B) Range:-75 - 75DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:11.010m [K=1.0000]
 Remarks:

**COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM**

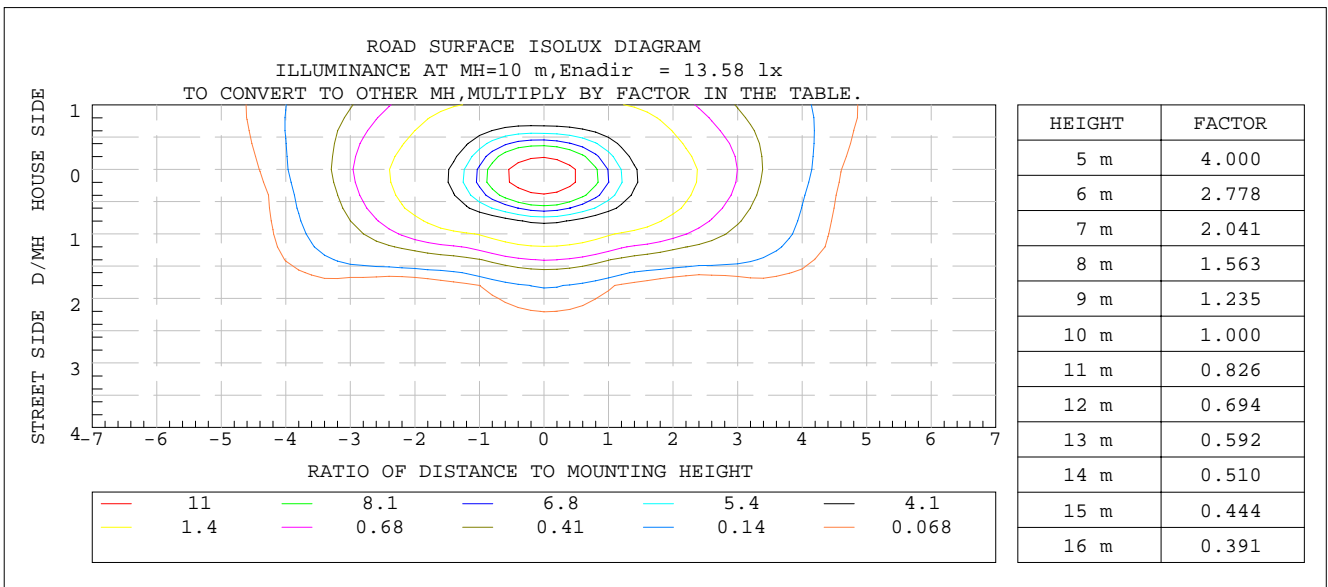

H(β) Range:-90 - 90DEG
H(β) Interval: 2.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Gao
Test Date:2018-10-19

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:11.010m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

Test:U:220.1V I:0.1500A P:31.10W PF:0.9420 Freq:50.00Hz Lamp Flux:5000x1 lm		
NAME: LED Street Light	TYPE:Cool White	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Spark Co., Ltd.	SUR.:	Shielding Angle:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	$\$lum, lamp$
10	1386	1414	1416	1405	1368	1228	1169	1240	0- 10	127.4	127.4	2.55,2.55
20	1494	1503	1372	1485	1445	1119	978.1	1155	10- 20	374.4	501.7	10,10
30	1656	1465	1225	1446	1579	1037	785.1	1087	20- 30	600.2	1102	22,22
40	1862	1396	891.4	1383	1771	970.9	578.0	1022	30- 40	791.0	1893	37.9,37.9
50	2132	997.7	528.9	1009	2042	859.9	357.4	879.7	40- 50	913.7	2807	56.1,56.1
60	2409	510.4	137.5	517.6	2338	642.0	123.4	632.8	50- 60	921.8	3728	74.6,74.6
70	2270	54.46	64.76	57.06	2301	343.5	60.92	325.9	60- 70	793.6	4522	90.4,90.4
80	235.2	19.03	0	20.45	316.8	38.76	0	28.15	70- 80	437.8	4960	99.2,99.2
90	1.089	0	0	0	6.007	0	0	0	80- 90	40.53	5000	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

H(β) Range:-90 - 90DEG
H(β) Interval: 2.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Gao
Test Date:2018-10-19

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:11.010m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM


Test:U:220.1V I:0.1500A P:31.10W PF:0.9420 Freq:50.00Hz Lamp Flux:5000x1 lm		
NAME: LED Street Light	TYPE:Cool White	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Spark Co., Ltd.	SUR.:	Shielding Angle:

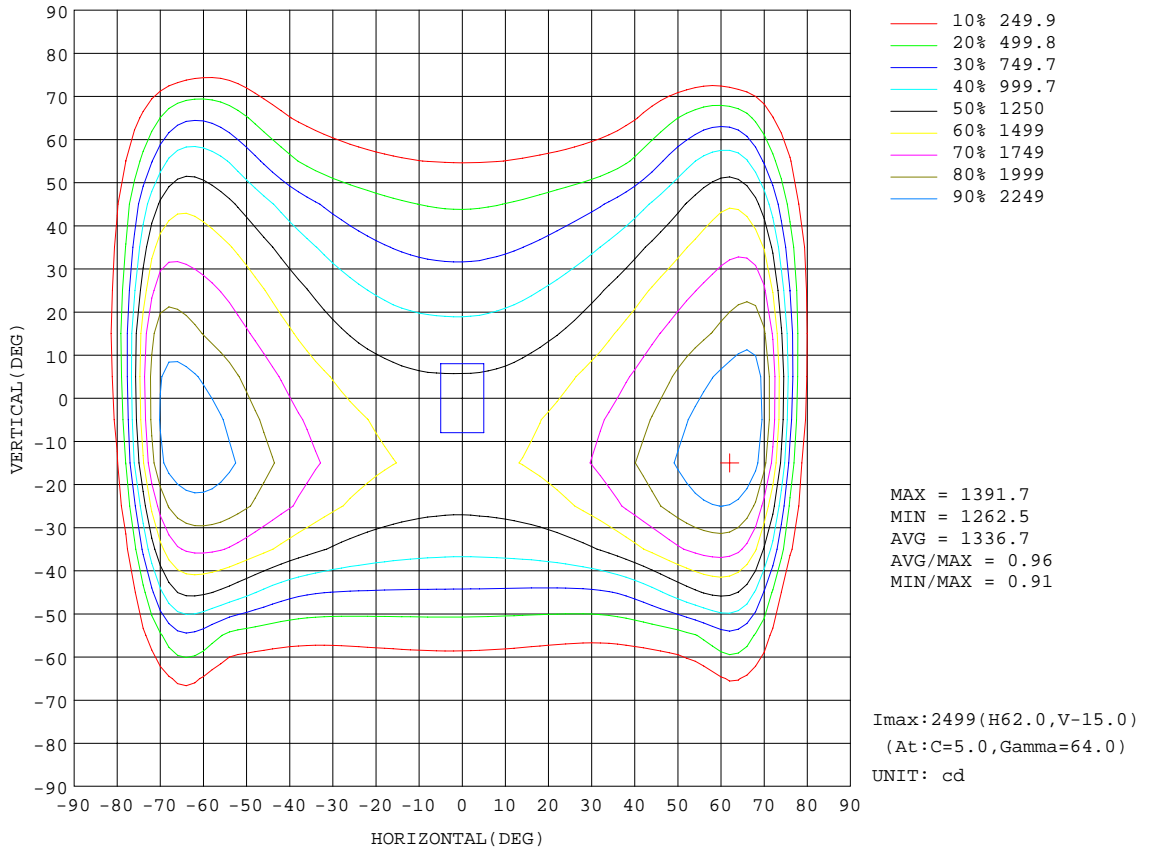

H(β) Range:-90 - 90DEG
 H(β) Interval: 2.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Gao
 Test Date:2018-10-19

V(B) Range:-75 - 75DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:11.010m [K=1.0000]
 Remarks:

Planar Illuminance Curve

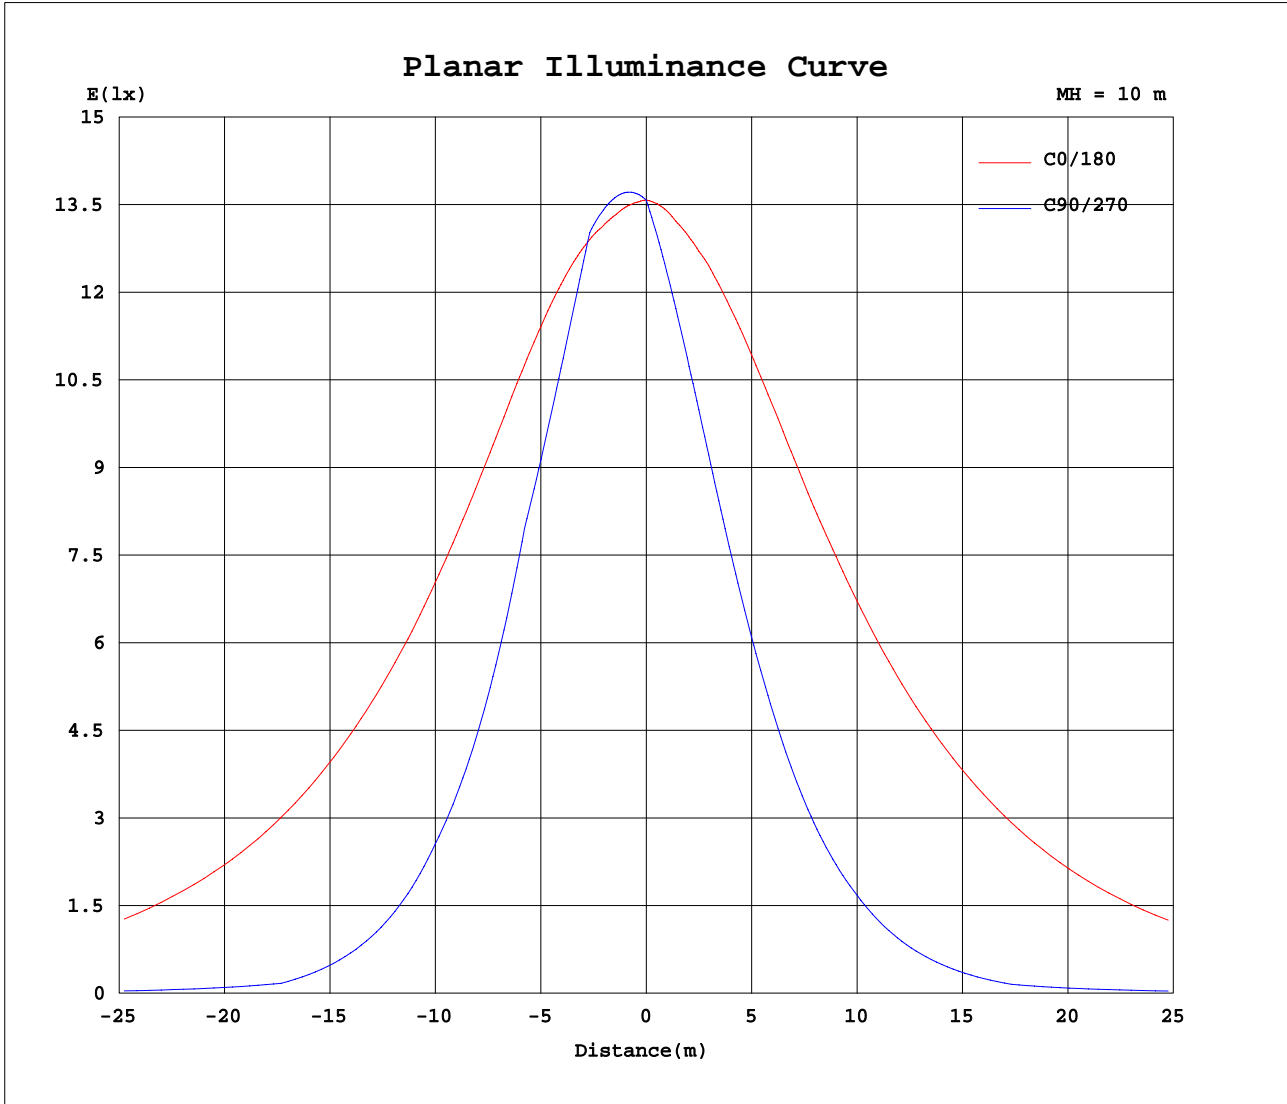


H(β) Range:-90 - 90DEG
 H(β) Interval: 2.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Gao
 Test Date:2018-10-19

V(B) Range:-75 - 75DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:11.010m [K=1.0000]
 Remarks:

LCS REPORT

Test:U:220.1V I:0.1500A P:31.10W PF:0.9420 Freq:50.00Hz Lamp Flux:5000x1 lm		
NAME: LED Street Light	TYPE:Cool White	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Spark Co., Ltd.	SUR.:	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

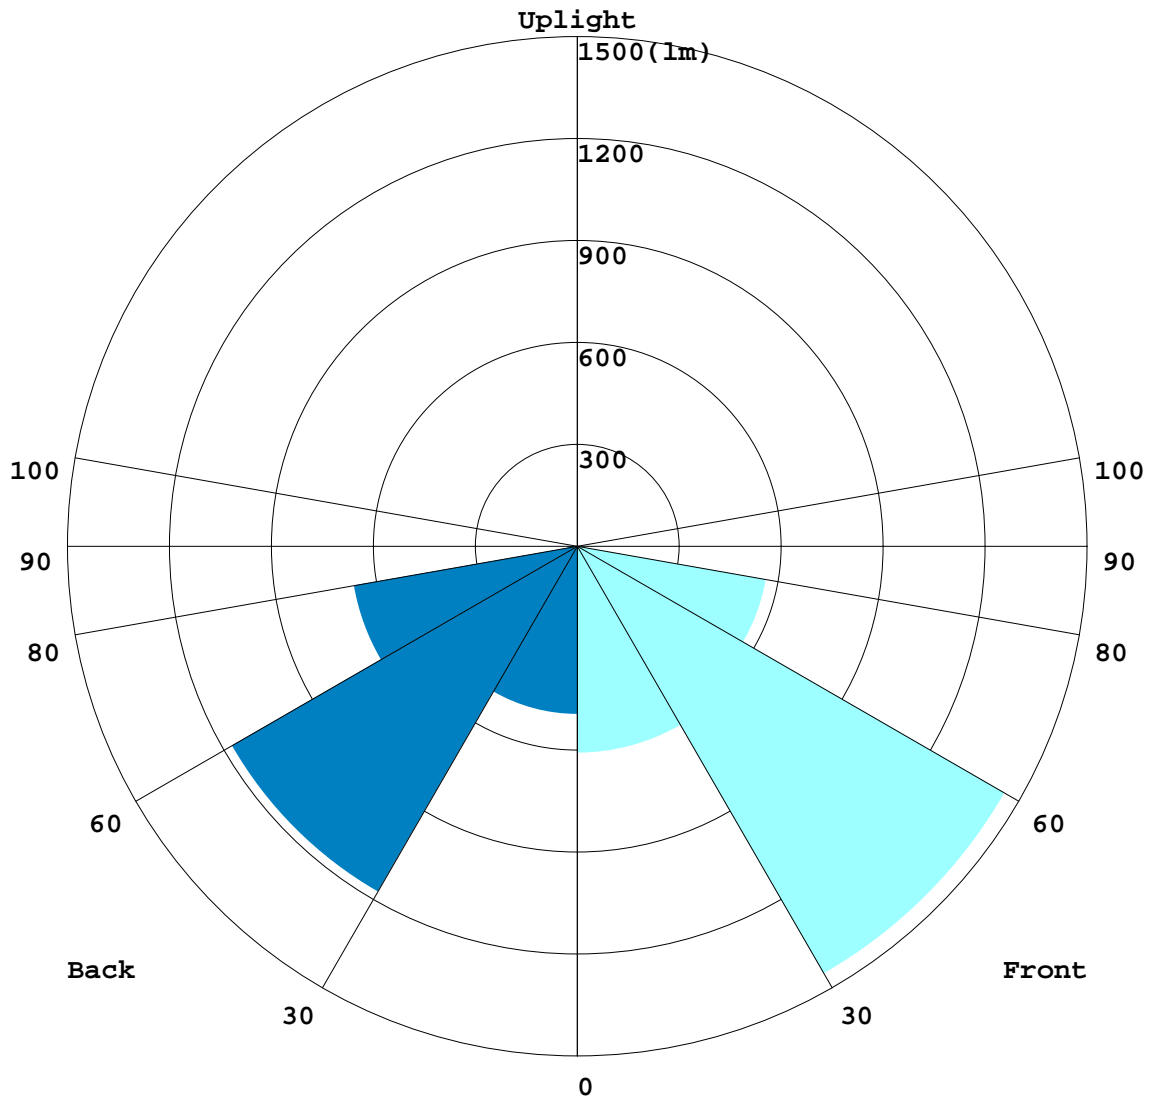

H(β) Range:-90 - 90DEG
H(β) Interval: 2.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Gao
Test Date:2018-10-19

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:11.010m [K=1.0000]
Remarks:

BUG REPORT

Test:U:220.1V I:0.1500A P:31.10W PF:0.9420 Freq:50.00Hz Lamp Flux:5000x1 lm		
NAME: LED Street Light	TYPE:Cool White	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Spark Co., Ltd.	SUR.:	Shielding Angle:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	607.81	12.2
FM - Front-Medium(30-60)	1452.7	29.1
FH - Front-High(60-80)	563.98	11.3
FVH - Front-Very High(80-90)	11.248	0.2
Total Forward Light	2635.7	52.7

BL - Back-Low(0-30)	494.15	9.9
BM - Back-Medium(30-60)	1173.8	23.5
BH - Back-High(60-80)	667.38	13.3
BVH - Back-Very High(80-90)	29.28	0.6
Total Back Light	2364.6	47.3

UL - Uplight-Low(90-100)	0	0.0
UH - Uplight-High(100-180)	0	0.0
Total Up Light	0	0.0

BUG(Back,Up,Glare) Rating	B2-U0-G2
----------------------------------	-----------------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	2364.6	0	2364.6
Street Side	2635.7	0	2635.7


H(β) Range:-90 - 90DEG
H(β) Interval: 2.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Gao
Test Date:2018-10-19

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:11.010m [K=1.0000]
Remarks:

ROAD ISOCANDELA REPORT

Test:U:220.1V I:0.1500A P:31.10W PF:0.9420 Freq:50.00Hz Lamp Flux:5000x1 lm		
NAME: LED Street Light	TYPE:Cool White	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Spark Co., Ltd.	SUR.:	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

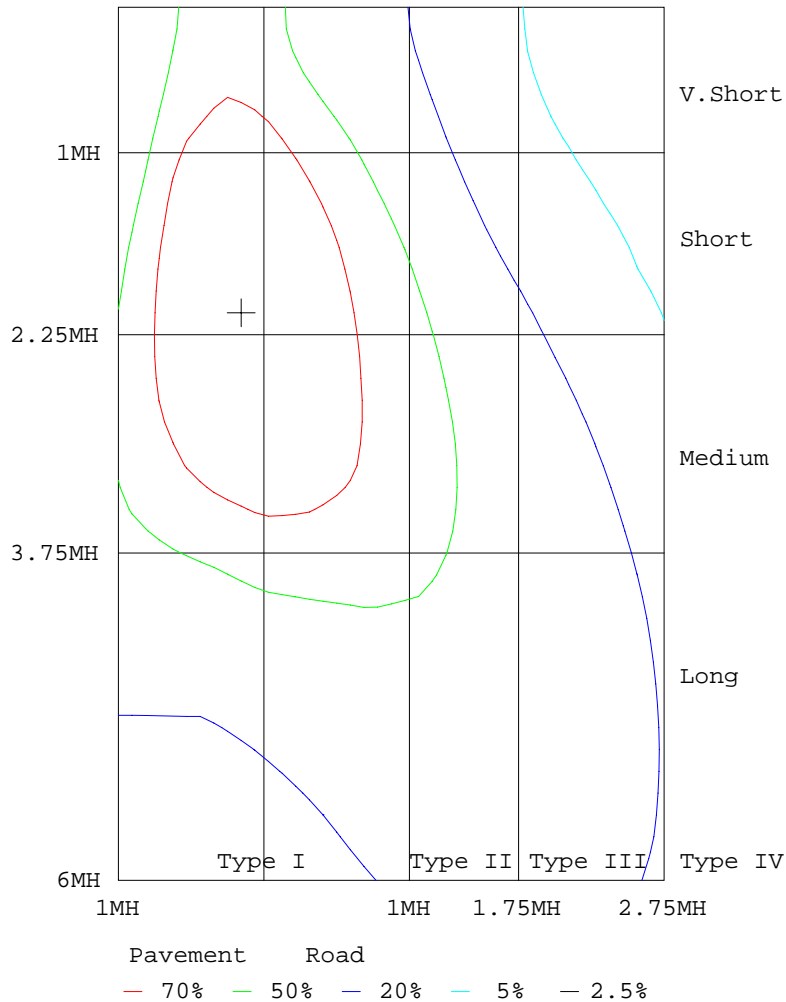

H(β) Range:-90 - 90DEG
 H(β) Interval: 2.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Gao
 Test Date:2018-10-19

V(B) Range:-75 - 75DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:11.010m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.1V I:0.1500A P:31.10W PF:0.9420 Freq:50.00Hz Lamp Flux:5000x1 lm		
NAME: LED Street Light	TYPE:Cool White	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Spark Co., Ltd.	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
0	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358
5	1364	1366	1369	1371	1373	1375	1377	1379	1380	1382	1383	1384	1384	1385	1386	1386	1387	1387	1387
10	1386	1391	1395	1399	1403	1406	1409	1410	1412	1414	1415	1416	1416	1417	1418	1418	1417	1416	1416
15	1432	1439	1445	1449	1452	1454	1455	1455	1455	1455	1454	1453	1452	1450	1450	1450	1448	1446	1445
20	1494	1503	1510	1515	1517	1516	1516	1513	1509	1503	1487	1461	1439	1419	1403	1391	1382	1375	1372
25	1569	1582	1590	1595	1597	1594	1589	1581	1534	1490	1451	1415	1385	1360	1339	1323	1312	1302	1299
30	1656	1673	1685	1692	1692	1687	1650	1586	1523	1465	1413	1368	1330	1299	1274	1254	1240	1230	1225
35	1752	1777	1796	1806	1806	1760	1675	1593	1513	1441	1374	1319	1244	1184	1137	1103	1079	1064	1058
40	1862	1895	1919	1934	1910	1810	1707	1603	1506	1396	1260	1153	1070	1008	963	930	909	896	891
45	1990	2031	2059	2074	1977	1862	1744	1621	1401	1216	1071	960	879	821	781	753	736	727	725
50	2132	2181	2212	2172	2045	1916	1746	1453	1200	998	846	740	670	620	583	557	540	531	529
55	2282	2332	2368	2244	2098	1903	1553	1231	956	743	612	522	457	411	377	355	341	334	333
60	2409	2450	2434	2247	2064	1685	1317	974	700	510	383	297	238	197	169	151	141	137	138
65	2468	2473	2344	2145	1781	1407	1013	657	403	237	130	73.6	76.3	80.8	85.7	90.7	95.2	98.8	101
70	2270	2162	1970	1711	1392	1007	577	235	55.5	54.5	54.4	54.4	55.0	56.9	58.8	60.5	62.2	63.7	64.8
75	1169	1053	1008	918	800	514	190	74.5	41.7	37.5	36.8	36.1	35.0	34.4	32.9	31.1	29.6	28.7	28.4
80	235	194	126	183	200	205	98.6	39.3	28.4	19.0	14.8	11.4	8.26	5.73	3.58	1.95	0.85	0.21	0.00
85	70.7	67.2	49.1	25.2	17.5	7.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	1.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 2.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Gao
Test Date:2018-10-19

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:11.010m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.1V I:0.1500A P:31.10W PF:0.9420 Freq:50.00Hz Lamp Flux:5000x1 lm		
NAME: LED Street Light	TYPE:Cool White	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Spark Co., Ltd.	SUR.:	Shielding Angle:

Table--2

UNIT: cd

C(DEG) γ (DEG)	95	100	105	110	115	120	125	130	135	140	145	150	155	160	165	170	175	180	185
0	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358
5	1387	1386	1385	1384	1383	1382	1381	1380	1378	1376	1375	1373	1371	1368	1366	1363	1361	1358	1350
10	1416	1415	1414	1413	1412	1411	1410	1408	1405	1402	1399	1396	1392	1388	1384	1379	1374	1368	1352
15	1445	1444	1444	1445	1445	1443	1442	1442	1441	1439	1437	1434	1430	1426	1421	1415	1408	1400	1374
20	1373	1378	1387	1398	1411	1429	1449	1472	1485	1487	1488	1487	1484	1480	1474	1466	1457	1445	1410
25	1300	1307	1319	1333	1353	1376	1404	1435	1471	1509	1548	1551	1551	1548	1542	1533	1521	1506	1461
30	1228	1237	1251	1270	1295	1325	1360	1400	1446	1496	1549	1603	1631	1630	1624	1614	1598	1579	1525
35	1063	1079	1102	1138	1185	1245	1315	1366	1423	1485	1553	1624	1697	1732	1726	1713	1693	1666	1604
40	897	911	934	969	1015	1077	1157	1258	1383	1483	1568	1655	1743	1828	1845	1830	1805	1771	1698
45	729	741	761	793	836	896	975	1079	1215	1387	1589	1691	1795	1895	1982	1967	1939	1899	1809
50	534	546	567	597	640	697	768	870	1009	1192	1421	1692	1846	1964	2080	2117	2088	2042	1927
55	338	348	365	391	429	480	547	639	762	951	1202	1501	1832	2012	2153	2274	2245	2199	2042
60	141	148	161	181	211	253	314	398	518	693	946	1267	1618	1985	2166	2351	2374	2338	2131
65	102	100	97.8	94.1	89.8	85.0	80.9	136	239	395	633	968	1352	1721	2071	2280	2411	2406	2188
70	65.1	65.0	64.4	63.5	62.1	60.1	58.8	57.9	57.1	56.5	219	533	975	1388	1726	2012	2244	2301	2141
75	28.8	29.9	31.7	33.9	35.8	36.9	38.2	38.9	39.4	42.4	51.4	170	517	876	1103	1229	1324	1460	1502
80	0.21	0.86	1.97	3.62	5.83	8.51	11.9	15.7	20.5	30.4	34.7	94.4	225	286	298	250	250	317	482
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.83	21.9	42.6	64.5	92.6	94.0	108
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.01	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 2.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Gao
Test Date:2018-10-19

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:11.010m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.1V I:0.1500A P:31.10W PF:0.9420 Freq:50.00Hz Lamp Flux:5000x1 lm		
NAME: LED Street Light	TYPE:Cool White	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Spark Co., Ltd.	SUR.:	Shielding Angle:

Table--3

UNIT: cd

C(DEG) γ (DEG)	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280
0	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358
5	1342	1334	1326	1318	1311	1304	1297	1291	1285	1280	1275	1271	1268	1266	1265	1264	1264	1264	1265
10	1335	1318	1302	1286	1270	1255	1241	1228	1216	1205	1196	1187	1181	1175	1171	1170	1169	1171	1173
15	1347	1320	1293	1267	1241	1216	1193	1171	1150	1133	1118	1104	1094	1085	1079	1076	1075	1077	1082
20	1373	1336	1298	1260	1222	1185	1151	1119	1091	1065	1041	1022	1006	994	985	979	978	982	989
25	1413	1363	1313	1261	1211	1163	1118	1075	1035	999	969	941	920	902	890	883	882	886	896
30	1467	1406	1343	1278	1214	1151	1092	1037	986	939	898	863	835	812	796	787	785	790	805
35	1536	1463	1387	1307	1227	1149	1073	1003	939	882	828	782	745	717	696	685	682	688	704
40	1617	1530	1439	1344	1247	1151	1059	971	886	811	748	695	652	619	596	582	578	584	602
45	1710	1606	1497	1385	1270	1158	1033	919	821	737	666	607	558	522	496	480	474	481	499
50	1803	1679	1554	1427	1289	1132	988	860	749	656	572	500	445	405	378	363	357	363	380
55	1879	1740	1605	1453	1271	1095	932	785	641	525	434	366	316	281	258	245	240	244	258
60	1929	1773	1620	1431	1236	1046	832	642	489	371	285	224	181	154	136	127	123	125	134
65	1958	1760	1572	1379	1163	926	692	484	323	213	163	132	114	103	97.1	93.6	92.1	92.4	94.7
70	1898	1661	1478	1260	1032	789	541	343	221	153	115	91.2	76.9	68.4	64.4	61.9	60.9	61.0	62.6
75	1483	1376	1221	1052	829	581	361	201	115	77.4	61.1	47.1	38.2	33.1	31.3	30.1	29.7	29.6	30.3
80	655	708	725	595	434	280	129	38.8	17.7	14.0	11.5	7.14	3.97	2.04	0.90	0.22	0.00	0.22	0.87
85	122	134	90.5	60.2	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 2.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Gao
Test Date:2018-10-19

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:11.010m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.1V I:0.1500A P:31.10W PF:0.9420 Freq:50.00Hz Lamp Flux:5000x1 lm		
NAME: LED Street Light	TYPE:Cool White	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Shenzhen Spark Co., Ltd.	SUR.:	Shielding Angle:

Table--4

UNIT: cd

C(DEG) γ (DEG)	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355				
0	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358	1358				
5	1267	1270	1273	1277	1282	1288	1294	1300	1307	1315	1323	1331	1339	1347	1355				
10	1178	1184	1192	1202	1213	1226	1240	1254	1269	1286	1302	1319	1336	1353	1369				
15	1090	1101	1115	1132	1151	1171	1194	1218	1244	1271	1298	1326	1353	1380	1407				
20	1001	1018	1039	1063	1091	1122	1155	1192	1229	1267	1306	1346	1385	1423	1459				
25	914	936	963	995	1032	1075	1120	1168	1219	1269	1322	1375	1426	1477	1524				
30	826	853	887	929	977	1030	1087	1148	1213	1280	1349	1417	1481	1543	1602				
35	729	763	806	860	922	987	1057	1132	1213	1298	1383	1466	1545	1619	1688				
40	629	667	716	776	847	929	1022	1117	1213	1316	1420	1522	1616	1704	1786				
45	528	568	621	685	762	852	957	1079	1216	1334	1454	1574	1690	1797	1898				
50	408	450	507	581	668	763	880	1019	1175	1343	1485	1621	1753	1882	2011				
55	281	315	365	432	522	637	788	947	1123	1308	1493	1649	1797	1946	2115				
60	149	174	213	271	354	471	633	836	1059	1260	1459	1649	1815	1986	2197				
65	98.8	106	118	141	182	289	465	692	939	1185	1412	1609	1800	2012	2248				
70	65.4	71.5	81.7	101	131	195	326	543	800	1044	1286	1517	1681	1903	2094				
75	31.6	35.9	43.2	55.5	68.0	104	190	346	557	807	1020	1166	1265	1269	1179				
80	1.96	3.74	6.68	11.0	12.8	15.7	28.2	80.9	203	353	499	572	520	448	345				
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	19.8	25.6	74.1	70.8	72.6				
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				

H(β) Range:-90 - 90DEG
H(β) Interval: 2.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Gao
Test Date:2018-10-19

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:11.010m [K=1.0000]
Remarks: